

NPCタイプ S=1/3

姿図

**ナカ工業株式会社**

品 名 : 柱・壁保護材  
コーナーガード

形 式 : NPCタイプ

仕 様 :

- 本体
  - NPCタイプ: 軟質塩化ビニル  
カラー/レモンイエロー  
グレー  
アイボリーホワイト  
ブラック  
ブラウン

- 取付下地材  
アルミニウム

- 定尺  
L=1000mm  
L=2000mm

- エンドキャップ(オプション)  
材質:軟質塩化ビニル


※アンカーは別途ご用意下さい。

下地取付例 S=1/3

■RC+モルタル納まり

This technical drawing illustrates a corner joint for a concrete (RC) structure finished with mortar. The drawing shows a vertical wall and a horizontal base meeting at a 90-degree corner. A vertical reinforcement bar (rebar) is shown passing through the corner, secured by a 'タップコン皿頭5×60' (Tapcon washer head 5x60). The rebar is anchored into the concrete. The drawing also shows the application of mortar to the corner, with a specific hatching pattern used to indicate the mortar finish. The drawing is labeled 'RC+モルタル納まり' (RC + Mortar finish) in the top right corner.

■ GL工法納まり

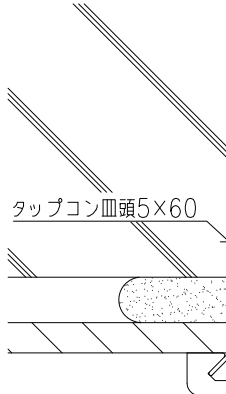

タップコン皿頭5×60

■LGS下地壁取合(2枚貼)

タッピングビス皿頭5×50

■ I = 1 000mm

100 420 990 420 50

アンカー穴 6-φ6.5

The diagram illustrates the layout of a 990mm wide floor slab. The top view shows the slab divided into four sections with widths of 100mm, 420mm, 420mm, and 50mm, totaling 990mm. The side view shows the slab's thickness and the placement of reinforcement bars. The reinforcement bars are shown as horizontal lines with dots indicating their positions. The top view also shows the placement of reinforcement bars at the corners of the slab sections.

アンカー穴 6-φ6.5

アンカー穴 10-φ6.5

	A	B	C	板厚
NPC-3535	14	37	6	1.2
NPC-6565	27	71	10	1.2
NPC-9090	41	102	12	1.6

断面詳細図

尺 度 :	作成日 : 2009.06.04
1/3, 1/10	(2015.1.20改訂)

サイズ :	File Name :
A3	NPC